



Introducing  
**00 Series Ultra Low Profile**

- Wheel diameter under 2"
- Load height under 2-1/2"
- Durable design handles dynamic loads up to 150 lbs per caster



innovation   
in  
**motion**

800-353-0868  
[www.shepherdcasters.com](http://www.shepherdcasters.com)



**New**

New 1-7/16" wheel diameter low profile size!

# 00 Series Ultra Low Profile



## Features

- Sleek, low profile design
- Up to 150 lb. dynamic load capacity per caster
- Dual ball bearing raceways for smooth and dependable swivel
- Models with polyolefin log wheel are NSF approved
- Industry leading selection and overall value
- Fast deliveries for any order quantity

## Applications

- Electronic Equipment
- Refrigeration Equipment
- Business Machines
- Store Fixtures
- Laboratory Equipment

## Options


- **Finishes:** Zinc plating standard; optional finishes available. Consult factory.




Wheel Diameter (Inches)	Tread Width (Inches)	Mounting Height (Inches)	Swivel Radius (Inches)	Tread Type	Dynamic Load (Pounds)	Base Model Number (Add fastening code)	Fastening Selection <sup>2</sup>
1-7/16"	1-11/16"	Stem: 2-3/16" Plate: 2-7/32"	1-3/4"	Polyolefin Log (Black)	150	C0014____ZN-POL01(KK)	<b>Threaded: 605, 741, 748</b> <b>Grip Ring: 211, 273</b> <b>Plate: 120</b>

<sup>2</sup>To order, include **blue** fastener code in **Base Model Number**. Example: C0014**605**ZN-SFR01(GG)


### Threaded Stem

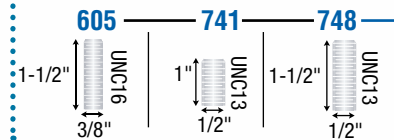

### Grip Ring Stem



### Top Plate



Shepherd offers a complete line of low profile casters.

